


# Master Cylinder Kit for LP70 Button Latch Low Profile Actuators



**70LP  
Actuator**

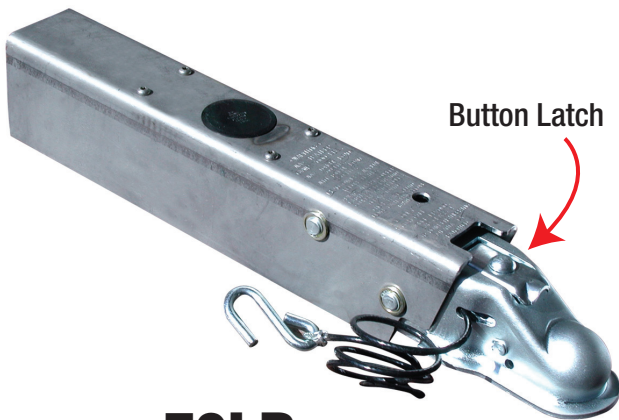

Hose, hose clamps & brass fitting is included only in the "Disc Brake Kit".

## Master Cylinder Kit Part Number 47267K Disc & 47271K Drum


### Tools Required

Wheel chocks to keep trailer from moving  
Jack stand to elevate trailer tongue  
3mm or 1/8" hex wrench for top four (4) screws  
10mm wrench for dampener rod  
14mm wrench for dampener rod lock nut  
9/16" for "zerc" end of pin/bolt  
3/4" or 19mm for jam nuts on the pins/bolts  
Rags or old towel to catch brake fluid  
Inch pound torque wrench

1. Secure the trailer on a level spot. Block the wheels and elevate the trailer tongue to be able to work on the actuator. Use old towels or rags under the actuator to catch brake fluid that might spill,
2. Remove the "guts" of the actuator from the housing.
  - a. Remove the plastic cap on the housing.
  - b. Remove the four stainless steel screws holding the master cylinder in place.
  - c. Remove the two bolts that have zerc fittings on one end. The kit has new replacement bolts.
  - d. Slide the coupler/master cylinder assembly out of the housing.
  - e. Remove the brake line from the rear of the master cylinder. Elevate the end of the hose to keep brake fluid from draining out of the brake lines.
3. Using a 10mm wrench for the rod, and a 14mm wrench for the nut, remove the lock nut holding the dampener rod to the coupler housing.
4. Slide the master cylinder away from the coupler. Remove the emergency stop cable from the "L" bracket.

Instruction #08169

**TIE DOWN ENGINEERING • 255 Villanova Drive SW • Atlanta, GA 30336**  
**www.tiedown.com (404) 344-0000 Fax (404) 349-0401**



110112, B1269