



PRODUCT DATA SHEET

Sta-Plex™ Extreme Pressure Premium Red Grease, 14 Wt Oz
Part Number: SL3190

Product Description

A superior multi-purpose certified lithium complex based NLGI #2 grease. Contains extreme pressure, anti-wear, & anti-oxidation additives. Ideal for high temperature & performance applications. Drop point 500°F

Applications

Ind. mining, metal production, machining, plastic molding, pumps, electric motors, ball & roller bearings, kilns, assembly plants, drying ovens, trucks, automobiles, buses, construction equipment, off-road operations, tractors mowers, reapers, water pumps

Unit Package Description

14 Ounce Cartridge

Brand

Sta-Lube

Generic Description 1

Premium Red Grease

Net Fill

14 Wt Oz

UPC Code

072213319002

Unit Dimensions

9.31H x 2.13W x 2.13D in

Units Per Case

10

Case Dimensions

9.5H x 4.5W x 11.38D in

Cases Per Pallet

150

Case Weight

10 lbs

I 2 of 5 Code

30072213319003

Appearance

Red Semi-Solid to Solid Grease

Base Type

Lithium Complex

Flash point (F)

475°F

Flash point (C)

246°C

Flammability Class - CPSC

None

Spec Gravity Concentrate

0.9 at 60°F

NLGI Grade

2

Timken OK Load Lbs.


60 Lbs Min

Plastic Safe

Not Determined

Evaporation Rate

<1 (butyl acetate=1)

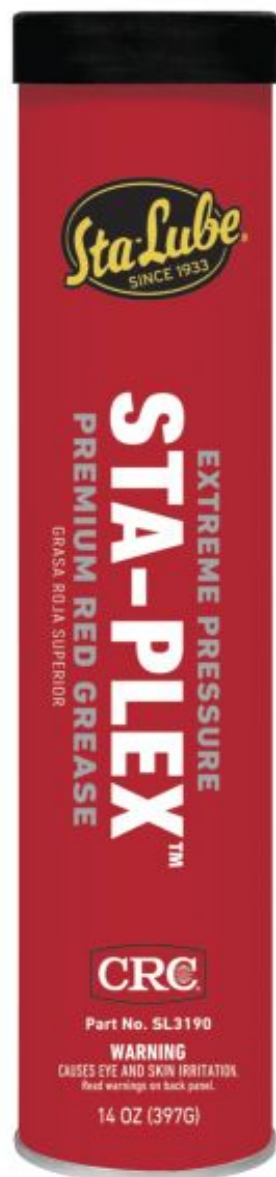

Last revised: 5/4/2016

Page 1 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



PRODUCT DATA SHEET

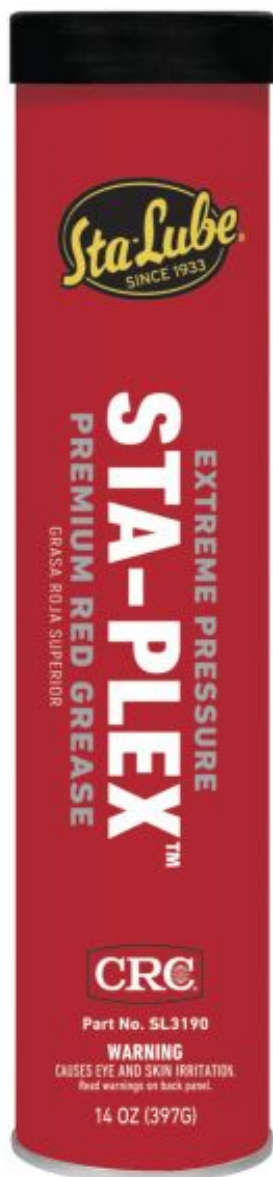

Working Temp (F)	-20 to 325°F
Working Temp (C)	-27 to 162°C
4 Ball EP	77 LWI, 500 Kg Weld
4 Ball Wear	0.4 typical; 0.6 Max
Drop Point	500+ °F
Elastomer Compatibility	0 to 30% vol; 0 to 15 hard
Leakage	10g Max
Low Temp Torque	15.5 Max
Oil Separation	<5
Oxidation Stability	5
Pour Point (F)	5°F
Pour Point (C)	-15°C
ISO Viscosity Grade	230
Water Washout	<5
Worked Penetration	265 to 295
Propellant	None
NSF Category Code	H2
NSF Number	145511
DOT Proper Shipping Name	Not Regulated
VOC % (Federal)	1
VOC g/L (Federal)	9
VOC Lbs./Gal. (Federal)	0.075
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

Last revised: 5/4/2016
Page 2 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.